




The Connect 30 back band can be moved forward and backwards and its height can also be altered.

**Forward and Backward Motion**


1. Whilst sitting in the boat – pull webbing through the labyrinth buckle situated on the rear of the back band until the back band is snug, [not tight].
2. Fine adjustment of the back band can be made by pulling and releasing the black lever located on the thigh grips.
3. Release the ratchet by pulling on the red release buckle on the thigh grip whilst easing pressure on the back band.

**Height Adjustment**


4. Loosen the height retention strap to allow full motion of the back band by releasing the ladder lock buckle.
5. Whilst sat in the boat – Move the back band to the correct height and then tighten the strap to retain this position.
6. Tighten the two elastic cords using the toggles located on the underside of the cockpit rim, to help hold it in the correct position.

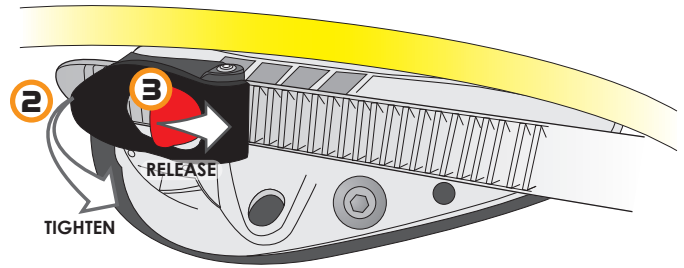

**WARNING:** OVER TIGHTENING THE BACK BAND MAY IMPEDE AN EASY AND FREE EXIT FROM THE BOAT. IT MAY ALSO PUT COMPONENTS UNDER EXCESSIVE STRESS WHICH CAN CAUSE PREMATURE COMPONENT FAILURE.

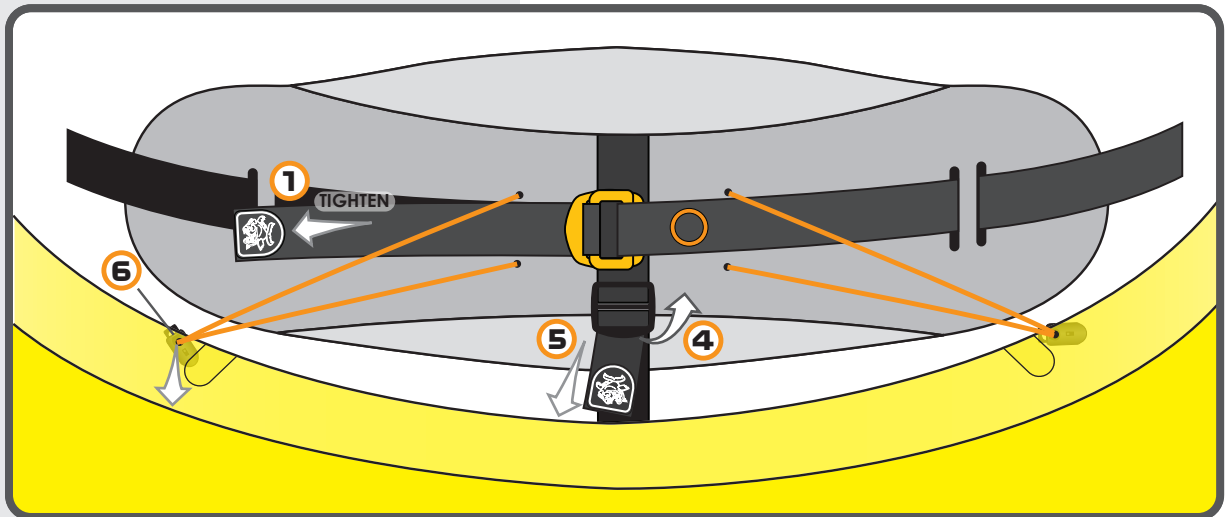

**HIP PAD ADJUSTMENT**

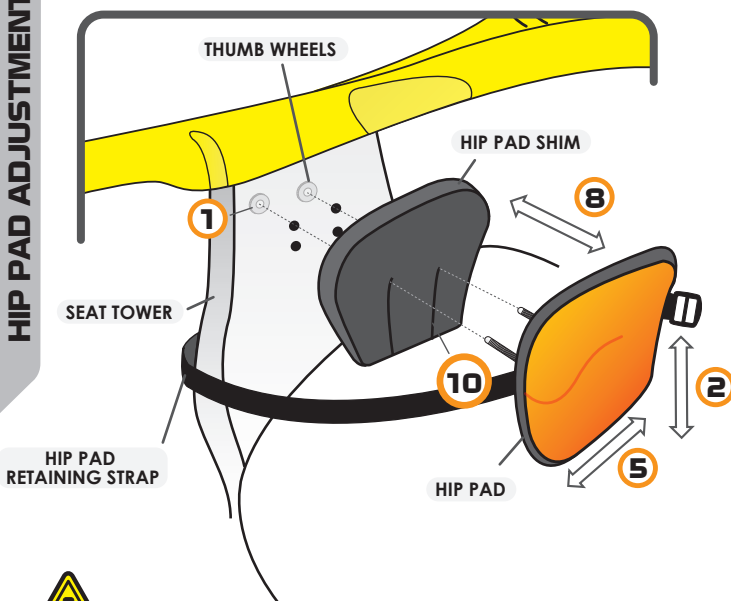

**CAUTION:** ONLY REMOVE THE SELF ADHESIVE BACKING FROM FOAM PADDING ONCE THE DESIRED FITTING HAS BEEN ACHIEVED.

The Hip Pads can be moved on 3 different axis; up and down, forwards and backwards and in and out.

**Up and Down**

1. Unscrew the thumb wheels by hand which are located on the inside of the seat tower. Then undo the hip pad retaining strap.
2. Pull the hip pad away from the seat tower and replace at the desired height, by locating the bolts in the holes.
3. Replace the thumb wheels and tighten to finger tight

**Forwards and Backwards**

4. Loosen the two thumb wheels and loosen the retention strap.
5. While sat in the boat - Slide the hip pads into position.
6. Tighten the strap and the thumb wheels to hold the hip pads in position. Only tighten thumb wheels by hand!

**In and Out**

7. Loosen the thumb screws and the retention strap.
8. Locate the foam shims on top of the bolts [still fixed into the seat tower] and adjust to optimum position.
9. Mark on the shim where the bolts are and then take the shim out of the boat.
10. Cut 2 slots approximately 50mm [2"] apart and 85mm [3 1/2"] deep, then slide the shims back into the boat.
11. Tighten the thumb screws and the retention strap to hold the shim and hip pad in place.



